

Submittal Data Sheet

Project Information

Project _____ Approval _____


Features

- Adjustable two stage line regulator 0 – 80 psig or
- Adjustable single stage line regulator 0 – 250 psig
- Flexible stainless braided pigtails (except Oxygen service – rigid copper pigtails provided per NFPA 99)
- CGA gas specific pigtail connections
- Complete system cleaned for use with Oxygen
- Cylinder contents gauge and delivery pressure gauge included
- Outlet connection – 1/4 Male NPT
- Wall mounting bracket included
- Maximum inlet pressure 3,000 psig
- Optional remote audio visual alarm

Ideal for dental & veterinary applications where automatic switching of cylinders or banks of cylinders is necessary. Systems are available for nitrous oxide, carbon dioxide, nitrogen, medical air and oxygen.



Model ATS-580-2 shown above

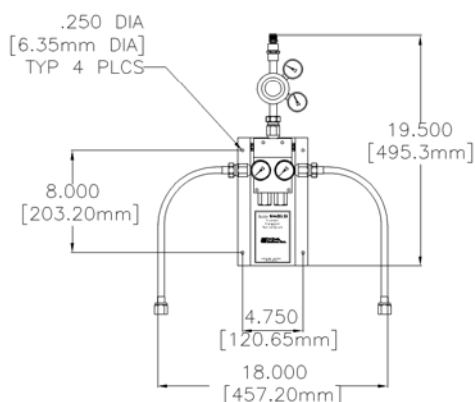

TAV-3 Alarm package (optional – sold separately) includes; audio/visual alarm, limit switch, 120 volt power supply (plug in), mounting bracket & 20' wire cable



Model ATS-580-2 with TAV-3 alarm with limit switch shown above

How to Order

Control Type	Delivery Pressure	Gas Service	Total # of Cylinders
ATS	Blank = 0 – 80 psig	346 = Medical Air	2 (1 x 1)
	HP = 0 – 250 psig	320 = Carbon Dioxide	4 (2 x 2)
		326 = Nitrous Oxide	6 (3 x 3)
		540 = Oxygen	
		580 = Nitrogen	

Examples: ATS-540-2 = ATS system, 0 – 80 psig, for Oxygen, 2 total cylinders
ATSHP-580-4 = ATS system, 0 – 180 psig, for Nitrogen, 4 total cylinders