



560 Series DISS Medical Gas Outlets

Elements

- Safety keyed to help prevent cross-connections
- Conforms to NFPA 99 and CGA/DISS standards
- Modular design
- Cleaned for oxygen service
- UL listed



Description

The Chemetron® 560 Series DISS outlet stations provide convenient access to medical gases in patient care locations. They are fully compatible with DISS style diameter indexed threaded adapters.

The outlets are field-gangable in any order desired by the facility. Outlets are spaced 5" (12.7 cm) center to center, and may be ganged with Chemetron modular electrical assemblies in a console arrangement. Outlet finish plates and rough-in plates are pin indexed using steel pins for positive cross-connection prevention. Primary valves are made of brass, nickel-plated, and contain a self-sealing poppet. Primary valves are field adjustable to compensate for variations in plaster thickness of 1/2" to 3/4". Outlets may be special ordered with extended valve bodies that allow for an additional 3/8" or 3/4" adjustment. The type K copper inlet tube has a 1/2" OD connection, and can rotate 360 degrees to accommodate any field piping arrangement.

Finish plates consist of a stainless steel insert surrounded by a silver metallic-finish ABS highimpact decorative trim.



560 Series DISS Medical Gas Outlet

The primary gas check can be serviced without shutting off the gas supply.


The outlet stations are fully compliant with NFPA 99 1999, CGA V-5 and CSA Z-305, and are cleaned for oxygen service in accordance with CGA G-4.1. The outlet is UL listed. Finish plates consist of a stainless steel insert surrounded by a silver metallic-finish ABS high-impact decorative trim. Gas identification is provided by a poly-carbonate plastic insert, color-coded by gas service. Vacuum outlets may be used with or without slide brackets for vacuum collection bottles of up to 1/2-gallon capacity. (Where slide brackets are used, order one per vacuum outlet.)

Ordering Information				
Gas Service	Catalog Number U.S. Color Codes	Quantity	Catalog Number ISO Color Codes	Quantity
Oxygen	64-04-5601P		64-04-5651P	
Vacuum	64-04-5602P		64-04-5652P	
Air	64-04-5603P		64-04-5653P	
Nitrous Oxide	64-04-5604P		64-04-5604P	
WAGD*	64-04-5606P		64-04-5606P	
Carbon Dioxide	64-04-5607P		64-04-5607P	
Oxygen/CO2 (CO2 less than 7%)	64-04-5608P		64-04-5658P	
Slide Bracket	64-06-0001P		64-06-0001P	
Nitrogen	64-04-5605P		N/A	

*Waste Anesthetic Gas Disposal (formerly Evacuation)



Dimensional Data

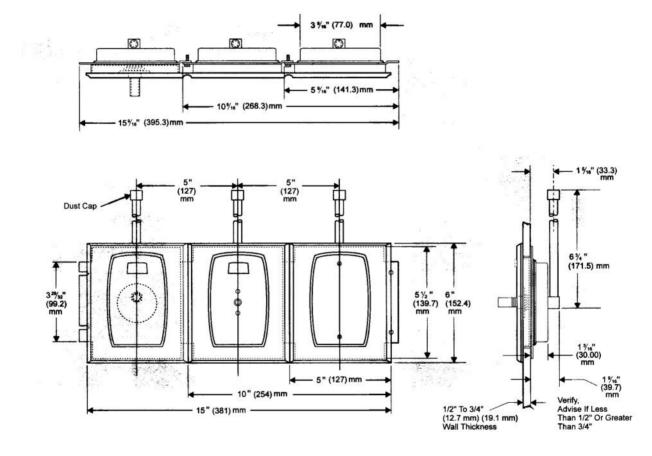

Refer to installation instructions prior to assembly.



Product Specification